

Spinsolve[™] 60

Unmatched Performance Meets Unbeatable Affordability

Premium performance at a price that makes best-in-class NMR accessible to everyone



Outstanding Features

- 60 MHz ¹H frequency
- High sensitivity:


single channel: > 200:1 for 1% Ethyl Benzene dual channel: > 140:1 for 1% Ethyl Benzene

High resolution:

Classic: 50 / 0.55 % < 0.50 / 20 Hz Plus: 50 / 0.55 % < 0.35 / 10 Hz


ULTRA: 50 / 0.55 / 0.11% < 0.20 / 7 / 14 Hz

- 5 mm standard NMR tubes
- No sample spinning required
- Advanced methods like COSY, HSQC-ME, HMBC, NOAH, NUS (all gradient assisted)
- · Benchtop footprint and weight
- No cryogens
- Available with automatic sample changer
- On-line reaction monitoring

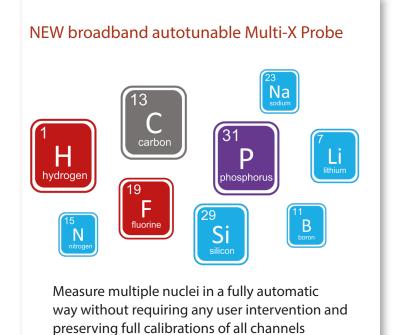


Fast and powerful, advanced multi-nuclear methods for structure confirmation

60 MHz NMR spectra of Gibberelic acid at 250 mMolar concentration

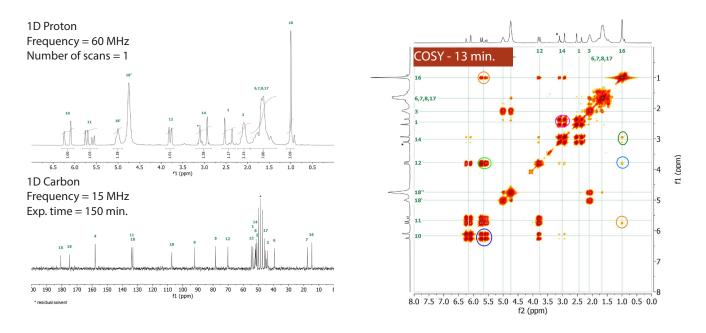


The HSQC is a powerful sequence widely used to correlate ¹H with the one-bond coupled ¹³C nuclei, respectivelly. The Spinsolve is equipped with a multiplicity edited version (HSQC-ME) of this method. It provides the editing power of the DEPT-135 sequence, which is useful to differentiate the signals of CH₂ groups (blue) from CH and CH₃ groups (red). To obtain long-range ¹H-¹³C correlations through two or three bond couplings, the Heteronuclear Multiple Bond Correlation (HMBC) experiment can be used. As an example, we show below the long-range correlations of proton 11 with carbons 13 (orange), 12 (blue) and 9 (green) are marked with circles. The experiment shows the correlation with quaternary carbons, too.

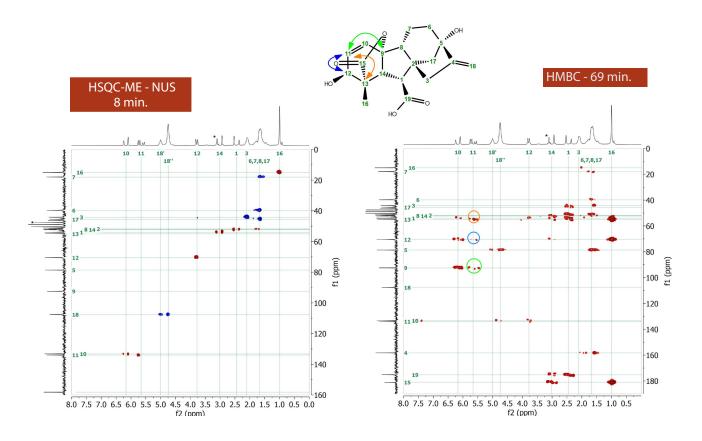

Software

The Spinsolve software is beautifully simple and easy to use, with a clean and intuitive user interface.

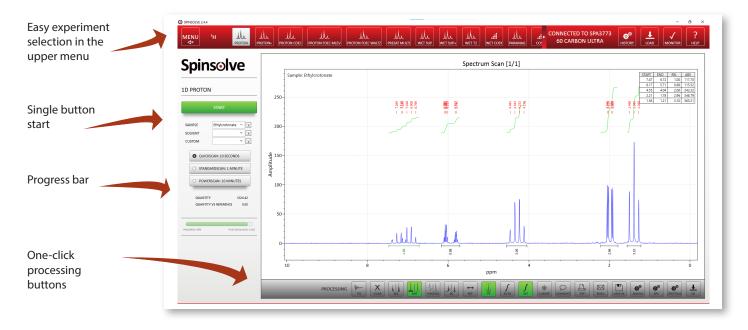


Simple menu structure

- 1. Click to choose nucleus
- 2. Click to choose experiment
- 3. Click Start (watch status on the progress bar)
- 4. Click any processing you wish to apply



Full Automation

Increase your sample measurement throughput by integrating the new fully automated autosampler carousel with your Spinsolve. The autosampler fits directly on the top of the Spinsolve and can easily be added or removed for transportation. The queue of protocols to be run for each sample can be entered in just a few seconds and it can be edited by the user at any time, even while data is being collected.

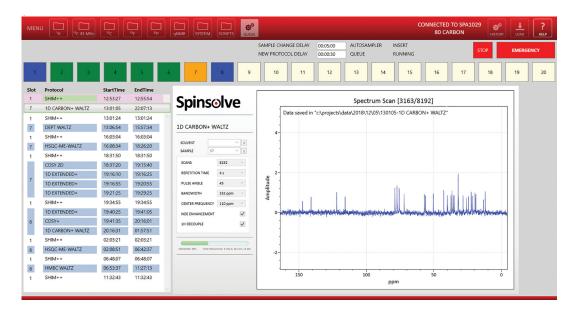

Spinsolve[™] 60



Specifications

- Operating frequency: 60 MHz (1H)
- Nuclei: ¹H, ¹⁹F, ¹³C, ³¹P, ⁷Li, ¹¹B, ²⁹Si, ¹²⁹Xe, ²D, ¹⁵N (more available)
- ¹H Linewidth Classic: 50 / 0.55 % < 0.50 / 20 Hz

Plus: 50 / 0.55 % < 0.35 / 10 Hz

ULTRA: 50 / 0.55 / 0.11% < 0.2 / 7 / 14 Hz

• ¹H Sensitivity single channel: >200:1 for 1% Ethyl Benzene

dual channel: >140:1 for 1% Ethyl Benzene

- Operating Temperature Range: 18° C to 28° C (65° F to 82° F)
- Dimensions: 58 x 43 x 40 cm (23" x 17" x16")
- Weight: 60 kg (132 lb)
- Stray Field: < 2 G all around the enclosure
- Voltage Requirement: 100-240 VAC, 50/60 Hz
- Available with automatic sample changer
- Compatible with the reaction monitoring kit
- 3D pulsed field gradients optimized for modern pulse sequences
- Optional diffusion PFG

Pulse sequences available on the Spinsolve 60



Proton	Fluorine	Carbon
1D with ¹⁹ F and ¹³ C decoupling	1D Fluorine with ¹ H decoupling	1D Carbon with ¹ H and ¹⁹ F decoupling
1D paramagnetic	2D F - COSY	DEPT
2D gs-COSY*, gs-JRES	2D F - JRES	APT
2D gs-TOCSY, and gs-ROESY	2D FH - COSY	HETCOR
1D solvent suppression (Presat and WET)	T ₁ , T ₂	gs-HSQC
1D solvent suppression with T ₂ filter	PFG-DOSY	gs-HSQC-ME*
2D gs-COSY with solvent suppression	Reaction Monitoring	gs-HMQC
T ₁ , T ₂		gs-HMBC*
PFG-DOSY		gs-NOAH*
Reaction Monitoring		*Non-Uniform Sampling (NUS) available

Other sequences available, contact Magritek for details.

Contact us now for a quote, to request a demo or to measure your samples

Email: <u>sales@magritek.com</u>

Website: www.magritek.com/contact-us

GERMANY +49 241 9278 7270 UNITED STATES +1 855 667 6835

UNITED KINGDOM +44 7468 529 615 NEW ZEALAND +64 4 477 7096

For a complete listing of our global offices and distributors visit: www.magritek.com/about-us/distributors/